


SimplePS

A 4" platform for basic I-V/C-V measurements.

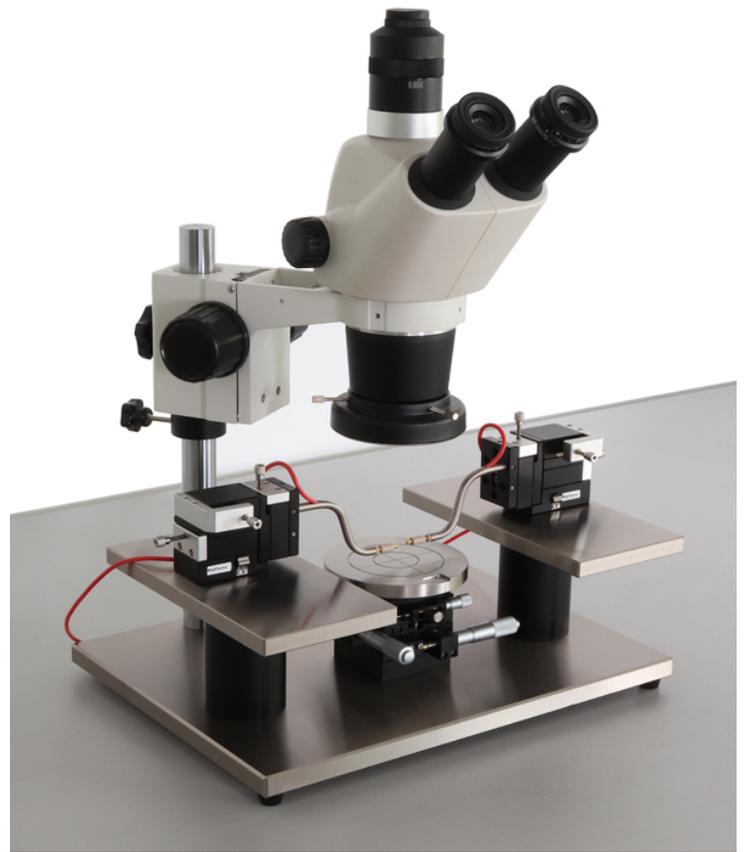

Application

Basic I-V/C-V, PIV Tests;
MEMS, NEMS, Optoelectronics Tests;
,etc.

Features

Application oriented – KitStart test kits for I-V/C-V, PIV tests.
Cost-effective – Extremely cost-effective model with basic probing functions.

Description

SimplePS offers a very simple platform for basic I-V/C-V probing with DTP100 micropositioners. With KeyFactor's S10 series probing accessories, the system can be set up to work with multimeters, power supplies, SMUs(Source and measurement units), LCR, etc.

Specifications

Chuck

Diameter	4"
Material	Stainless Steel
Plating	N.A.
Planarity	<5µm@Ambient Temperature

Chuck Stage

X-Y travel range (Coarse)	Magnetic Stage, driven by hands.
X-Y travel range (Fine)	25mm*25mm
Resolution	1 micron
Theta travel range (fine)	±9°
Theta resolution	0.0001°/deg
Theta travel range (coarse)	360°

Platen&Base

Material	Steel, Ni-Plated
Space	For up to 4 DTP positioners. Can be customized for more positioners.
Mounting Compatibility	Magnetic and vacuum mounting.
Height Adjustment	N.A.

Stereo Microscope

Magnification	5X~100X
Zoom Lens	0.75~5X
Eyepeices	10X
Z Travel Range	50mm
Stand	Boom Stand

Physical Dimensions

Part #	Description
SimplePS	20kg, 350mm*260mm (footprint W*D)


Measurement Accuracy


Part #	Range	Accuracy
SimplePS-BasicI-V	1µA	rdg+10nA
SimplePS-COAX	1nA	rdg+10pA
SimplePS-COAX-PIV	1nA	rdg+10pA
SimplePS-TRIAX	10pA	rdg+100fA

Order Information (standard systems)

Part #	Description
SimplePS-Basic I-V	1 SimplePS with 2 SETs of DTP100 and S10-BA probe holder. Generally used with SMUs, power supplies and multimeters. Additional 2 SETs of DTP100 and S10-BA can be ordered for 4 wire measurement.
SimplePS-COAX	1 SimplePS with 2 SETs of DTP100 and S10-COAX-BNC probe holder. Generally used with SMUs(adapters might be needed), Oscilloscopes, LCR, etc.
SimplePS-COAX-PIV	1 SimplePS with 2 SETs of DTP100 and S10-COAX-SMA probe holder. For ultra-fast I-V tests: pulsed I-V, transient I-V, and pulsed sourcing.
SimplePS-TRIAX	1 SimplePS with 2 SETs of DTP100 and S10-COAX-TRIAX probe holder. For high resolution I-V measurement with SMUs and semiconductor characterization systems, such as Keithley 2450, 2600, 4200 and Keysight 2900, B1500., etc.

More micropositioners and probe holders can be ordered for devices with more terminals.

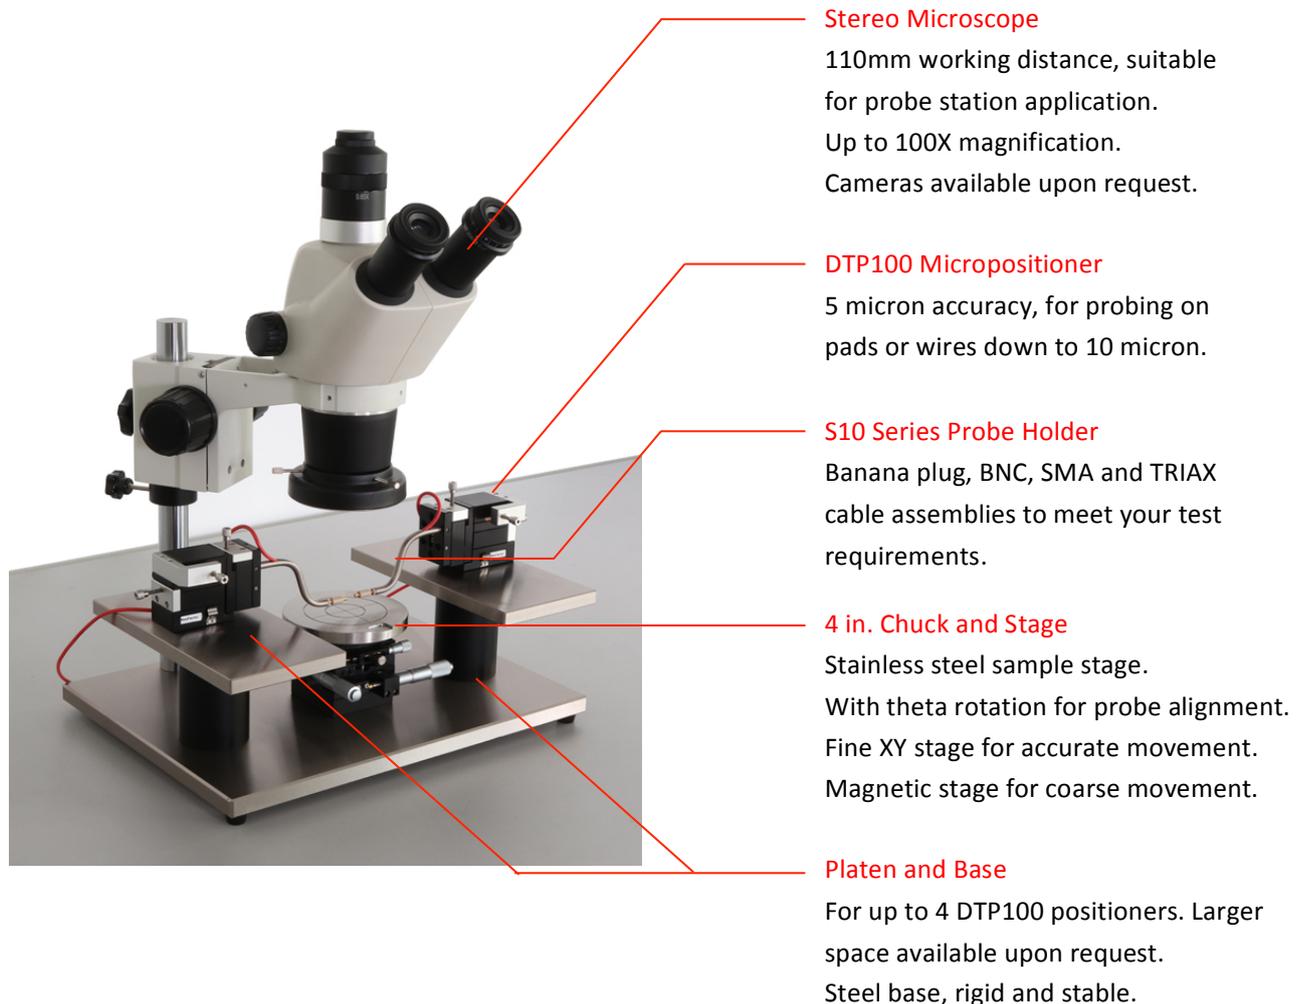



Specifications and designs are subject to change without notice.

All Rights Reserved. KeyFactor Systems, Inc.

KeyFactor Systems, Inc.

www.keyfactorsystems.com

sales@keyfactorsystems.com

technical-support@keyfactorsystems.com

U.S.

Add: 8825 53 AVE Elmhurst, New York,
United States.

Tel: +1(347) 994-9951

China

Add: 5th FL, Sohovark, Industrial Rd. South,
SSL, Dongguan.

Tel: +86(769)2223-8503

Fax: +86(769)2223-0701